



### Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- "UL8750 listed" safety approved for HLG-80H-□BL
- Class 2 power unit
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)



HLG-80H-12[A] Blank : IP67 rated. Cable for I/O connection.  
 A : IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.  
 B : IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.  
 BL (option) : Contact MEAN WELL for details.  
 D (option) : IP67 rated. Timer dimming function, contact MEAN WELL for details.


### SPECIFICATION

| MODEL                   | HLG-80H-12   | HLG-80H-15   | HLG-80H-20 | HLG-80H-24      | HLG-80H-30 | HLG-80H-36    | HLG-80H-42 | HLG-80H-48 | HLG-80H-54 |            |  |
|-------------------------|--|--|------------|-----------------|------------|---------------|------------|------------|------------|------------|--|
| OUTPUT                  | DC VOLTAGE   | 12V  | 15V        | 20V             | 24V        | 30V           | 36V        | 42V        | 48V        | 54V        |  |
|                         | CONSTANT CURRENT REGION Note.4   | 7.2 ~ 12V  | 9 ~ 15V    | 12 ~ 20V        | 14.4 ~ 24V | 18 ~ 30V      | 21.6 ~ 36V | 25.2 ~ 42V | 28.8 ~ 48V | 32.4 ~ 54V |  |
|                         | RATED CURRENT  | 5A   | 5A         | 4A              | 3.4A       | 2.7A          | 2.3A       | 1.95A      | 1.7A       | 1.5A       |  |
|                         | RATED POWER  | 60W  | 75W        | 80W             | 81.6W      | 81W           | 82.8W      | 81.9W      | 81.6W      | 81W        |  |
|                         | RIPPLE & NOISE (max.) Note.2   | 150mVp-p   | 150mVp-p   | 150mVp-p        | 150mVp-p   | 200mVp-p      | 200mVp-p   | 200mVp-p   | 200mVp-p   | 200mVp-p   |  |
|                         | VOLTAGE ADJ. RANGE Note.6  | 10.8 ~ 13.5V   | 13.5 ~ 17V | 17 ~ 22V        | 22 ~ 27V   | 27 ~ 33V      | 33 ~ 40V   | 38 ~ 46V   | 43 ~ 53V   | 49 ~ 58V   |  |
|                         | CURRENT ADJ. RANGE   | Can be adjusted by internal potentiometer or through output cable  |            |                 |            |               |            |            |            |            |  |
|                         | VOLTAGE TOLERANCE Note.3   | ±2.5%  | ±2.0%      | ±1.0%           | ±1.0%      | ±1.0%         | ±1.0%      | ±1.0%      | ±1.0%      | ±1.0%      |  |
|                         | LINE REGULATION  | ±0.5%  | ±0.5%      | ±0.5%           | ±0.5%      | ±0.5%         | ±0.5%      | ±0.5%      | ±0.5%      | ±0.5%      |  |
|                         | LOAD REGULATION  | ±2.0%  | ±1.5%      | ±1.0%           | ±0.5%      | ±0.5%         | ±0.5%      | ±0.5%      | ±0.5%      | ±0.5%      |  |
| SETUP, RISE TIME Note.8 | 200ms, 80ms / 115VAC at full load ; 1000ms, 80ms / 230VAC at full load ; B type 200ms, 200ms at 95% load ; 230VAC / 115VAC   |  |            |                 |            |               |            |            |            |            |  |
| HOLD UP TIME (Typ.)     | 16ms at full load ; 230VAC / 115VAC  |  |            |                 |            |               |            |            |            |            |  |
| INPUT                   | VOLTAGE RANGE Note.5   | 90 ~ 305VAC  |            | 127 ~ 431VDC    |            |               |            |            |            |            |  |
|                         | FREQUENCY RANGE  | 47 ~ 63Hz  |            |                 |            |               |            |            |            |            |  |
|                         | POWER FACTOR (Typ.)  | PF>0.96/115VAC, PF>0.96/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curve)  |            |                 |            |               |            |            |            |            |  |
|                         | EFFICIENCY (Typ.)  | 88%  | 89%        | 90%             | 90.5%      | 91%           | 91%        | 91%        | 91%        | 91%        |  |
|                         | AC CURRENT (Typ.)  | 0.85A / 115VAC   |            | 0.425A / 230VAC |            | 0.4A / 277VAC |            |            |            |            |  |
|                         | INRUSH CURRENT (Typ.)  | COLD START 70A/230VAC  |            |                 |            |               |            |            |            |            |  |
|                         | LEAKAGE CURRENT  | <0.75mA / 277VAC   |            |                 |            |               |            |            |            |            |  |
| PROTECTION              | OVER CURRENT Note.4  | 95 ~ 108%  |            |                 |            |               |            |            |            |            |  |
|                         | SHORT CIRCUIT  | Protection type : Constant current limiting, recovers automatically after fault condition is removed   |            |                 |            |               |            |            |            |            |  |
|                         | OVER VOLTAGE   | 14 ~ 17V   | 18 ~ 24V   | 23 ~ 30V        | 28 ~ 35V   | 35 ~ 43V      | 41 ~ 49V   | 48 ~ 58V   | 54 ~ 63V   | 59 ~ 68V   |  |
|                         | OVER TEMPERATURE   | 85°C ±10°C (RTH2)<br>Protection type : Shut down o/p voltage, re-power on to recover   |            |                 |            |               |            |            |            |            |  |
| ENVIRONMENT             | WORKING TEMP.  | -40 ~ +70°C (Refer to "Derating Curve")  |            |                 |            |               |            |            |            |            |  |
|                         | WORKING HUMIDITY   | 20 ~ 95% RH non-condensing   |            |                 |            |               |            |            |            |            |  |
|                         | STORAGE TEMP., HUMIDITY  | -40 ~ +80°C, 10 ~ 95% RH   |            |                 |            |               |            |            |            |            |  |
|                         | TEMP. COEFFICIENT  | ±0.03%/°C (0 ~ 60°C)   |            |                 |            |               |            |            |            |            |  |
|                         | VIBRATION  | 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes  |            |                 |            |               |            |            |            |            |  |
| SAFETY & EMC            | SAFETY STANDARDS Note.7  | UL8750, CSA C22.2 No. 250.0-08(except for HLG-80H-48/54V & HLG-80H-48/54BL), UL8750 listed for HLG-80H-□BL<br>EN61347-1, EN61347-2-13 independent, J61347-1, J61347-2-13, IP65 or IP67 approved ; Design refer to UL60950-1, TUV EN60950-1 |            |                 |            |               |            |            |            |            |  |
|                         | WITHSTAND VOLTAGE  | I/P-O/P: 3.75KVAC I/P-FG: 1.88KVAC O/P-FG: 0.5KVAC   |            |                 |            |               |            |            |            |            |  |
|                         | ISOLATION RESISTANCE   | I/P-O/P, I/P-FG, O/P-FG: 100M Ohms / 500VDC / 25°C / 70% RH  |            |                 |            |               |            |            |            |            |  |
|                         | EMC EMISSION   | Compliance to EN55015, EN61000-3-2 Class C (≥60% load) ; EN61000-3-3   |            |                 |            |               |            |            |            |            |  |
|                         | EMC IMMUNITY   | Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A   |            |                 |            |               |            |            |            |            |  |
| OTHERS                  | MTBF   | 357.8Khrs min. MIL-HDBK-217F (25°C)  |            |                 |            |               |            |            |            |            |  |
|                         | DIMENSION  | 195.6*61.5*38.8mm (L*W*H)  |            |                 |            |               |            |            |            |            |  |
|                         | PACKING  | 0.84Kg; 16pcs/14.4Kg/0.54CUFT  |            |                 |            |               |            |            |            |            |  |
| NOTE                    | <ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. Constant current operation region is within 60% ~ 100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.</li> <li>5. Derating may be needed under low input voltages. Please check the static characteristics for more details.</li> <li>6. Type A only.</li> <li>7. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18.</li> <li>8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.</li> <li>9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</li> <li>10. Refer to warranty statement.</li> </ol> |  |            |                 |            |               |            |            |            |            |  |


**Mechanical Specification**

Case No.997A Unit:mm

**Blank:(HLG-80H)**

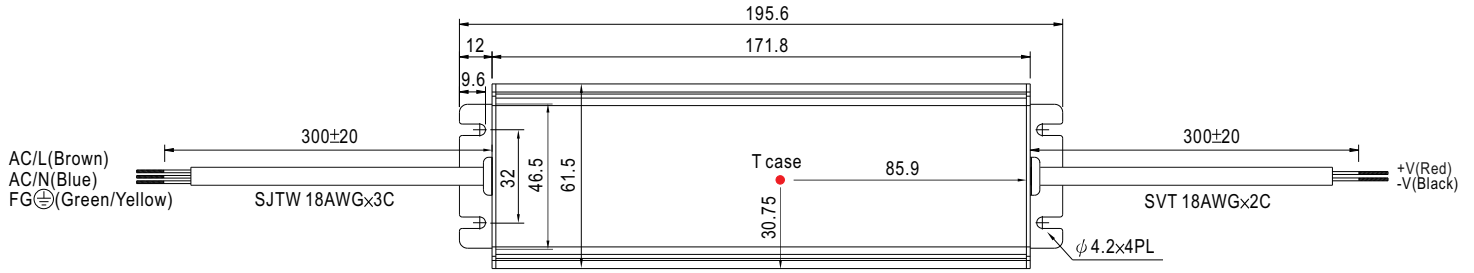


※ T case: Max. Case Temperature.

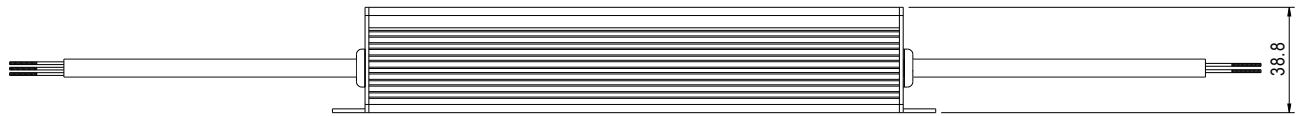

※IP67 rated. Cable for I/O connection.

**A Type:(HLG-80H- \_A)**

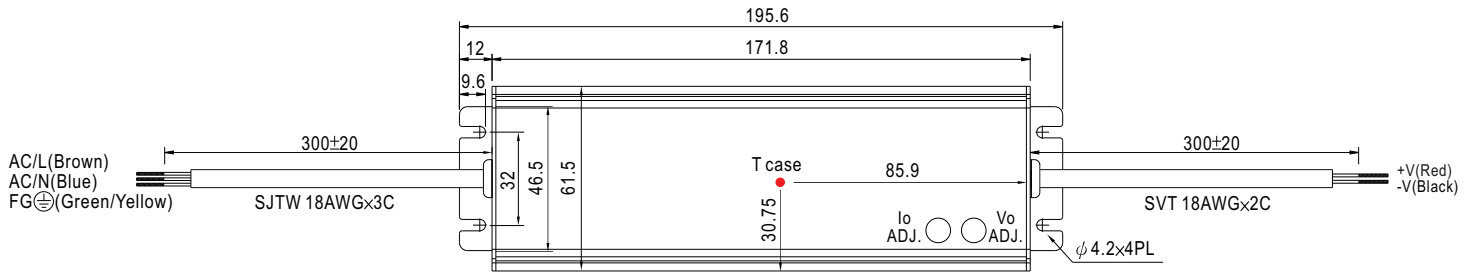


※ T case: Max. Case Temperature.



※ IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.  
(Can access by removing the rubber stopper on the case.)


**B Type:(HLG-80H- \_B)**

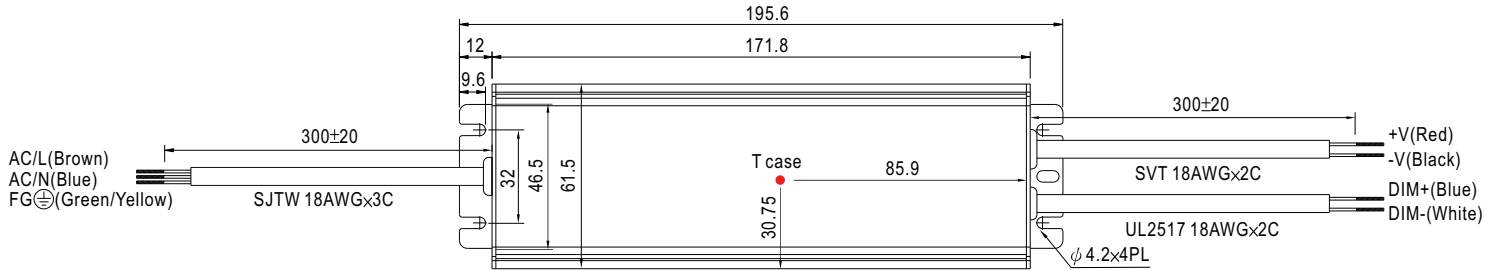

※ T case: Max. Case Temperature.




D Type(option):(HLG-80H-\_D)

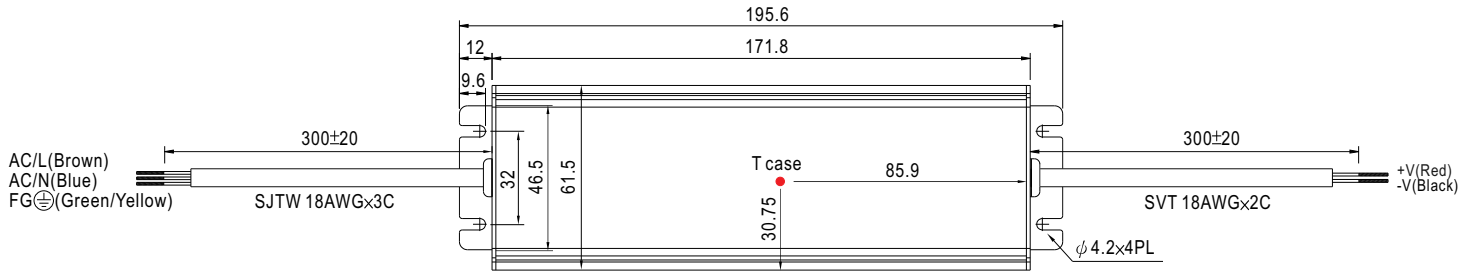


※ T case: Max. Case Temperature.

※ IP67 rated. Timer dimming function, contact MEAN WELL for details.


■ Block Diagram

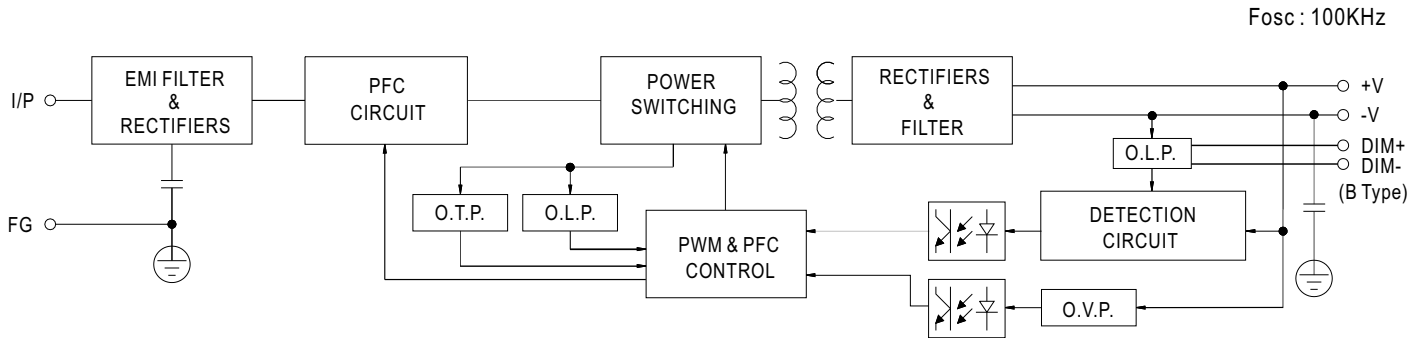


■ Derating Curve

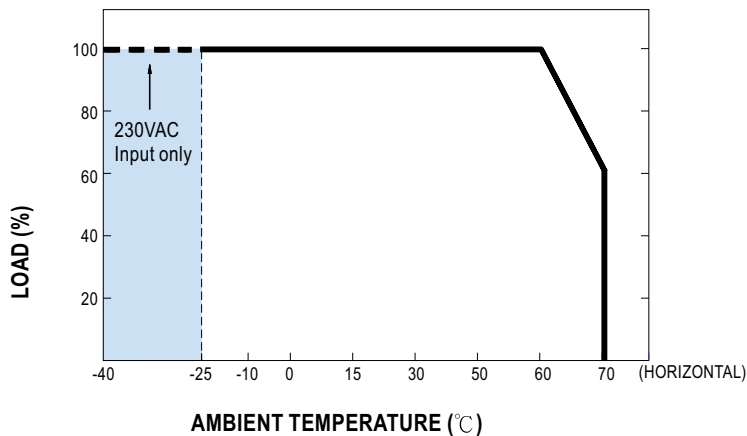

■ Static Characteristics

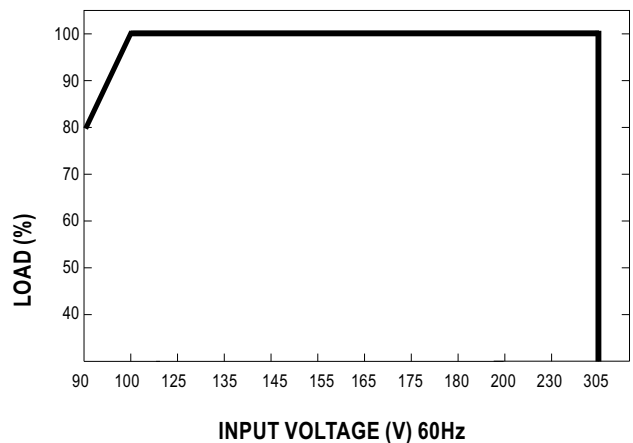


### Power Factor Characteristic

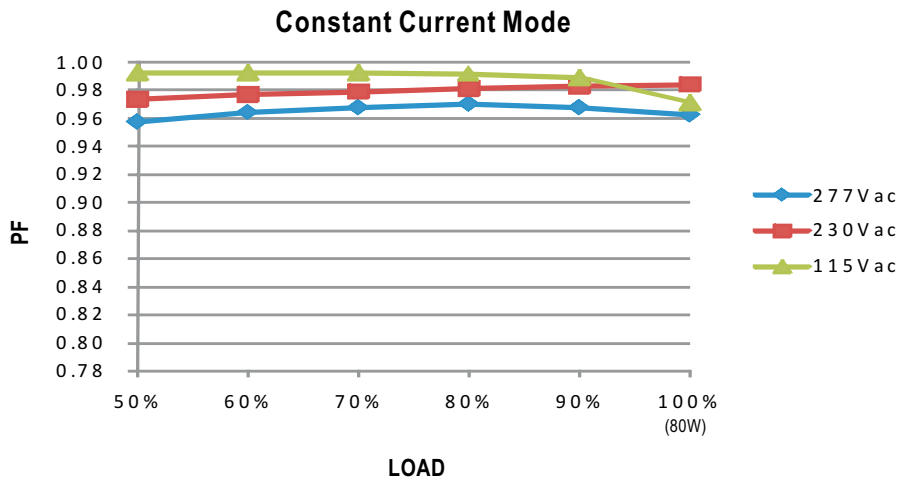

### EFFICIENCY vs LOAD (48V Model)

HLG-80H series possess superior working efficiency that up to 91% can be reached in field applications.

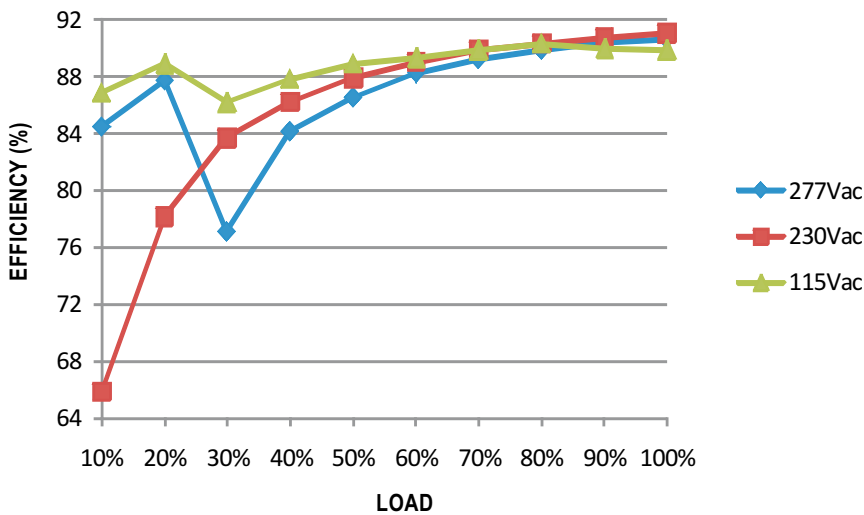


### DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".


A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode [with LED driver, at area (A)] and CC mode [direct drive, at area (B)].

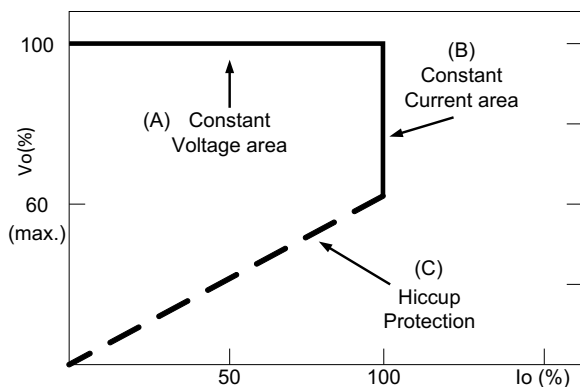

Typical LED power supply I-V curve

## DIMMING OPERATION

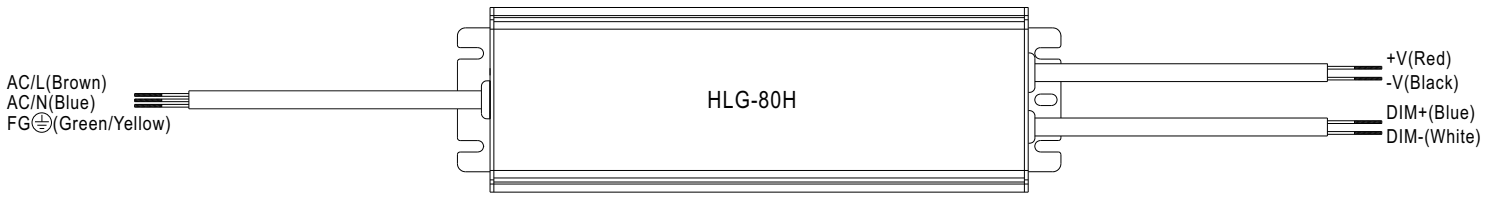

※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

※ Reference resistance value for output current adjustment (Typical)

| Resistance value            | Single driver  | 10KΩ   | 20KΩ   | 30KΩ   | 40KΩ   | 50KΩ   | 60KΩ   | 70KΩ   | 80KΩ   | 90KΩ   | 100KΩ   | OPEN      |
|-----------------------------|--|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-----------|
|                             | Multiple drivers<br>(N=driver quantity for synchronized dimming operation) | 10KΩ/N | 20KΩ/N | 30KΩ/N | 40KΩ/N | 50KΩ/N | 60KΩ/N | 70KΩ/N | 80KΩ/N | 90KΩ/N | 100KΩ/N | -----     |
| Percentage of rated current |  | 10%    | 20%    | 30%    | 40%    | 50%    | 60%    | 70%    | 80%    | 90%    | 100%    | 102%~108% |

※ 1 ~ 10V dimming function for output current adjustment (Typical)


| Dimming value               | 1V  | 2V  | 3V  | 4V  | 5V  | 6V  | 7V  | 8V  | 9V  | 10V  | OPEN      |
|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----------|
| Percentage of rated current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 102%~108% |

※ 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz

| Duty value                  | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | OPEN      |
|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----------|
| Percentage of rated current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 102%~108% |

※ Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

Dimming connection diagram for turning the lighting fixture ON/OFF :

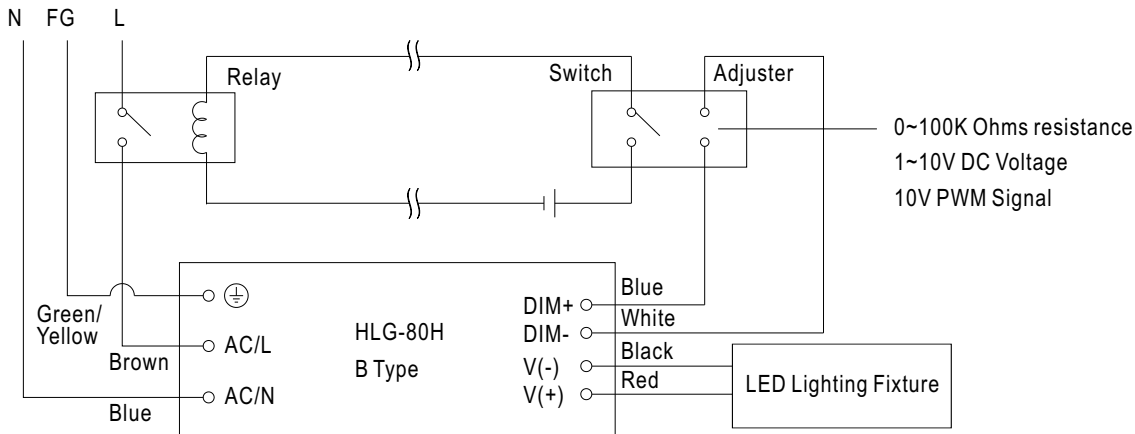


Using a switch and relay can turn ON/OFF the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
2. The LED lighting fixture can be turned ON/OFF by the switch.


## WATERPROOF CONNECTION

### Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-80H to operate in dry/wet/damp or outdoor environment.

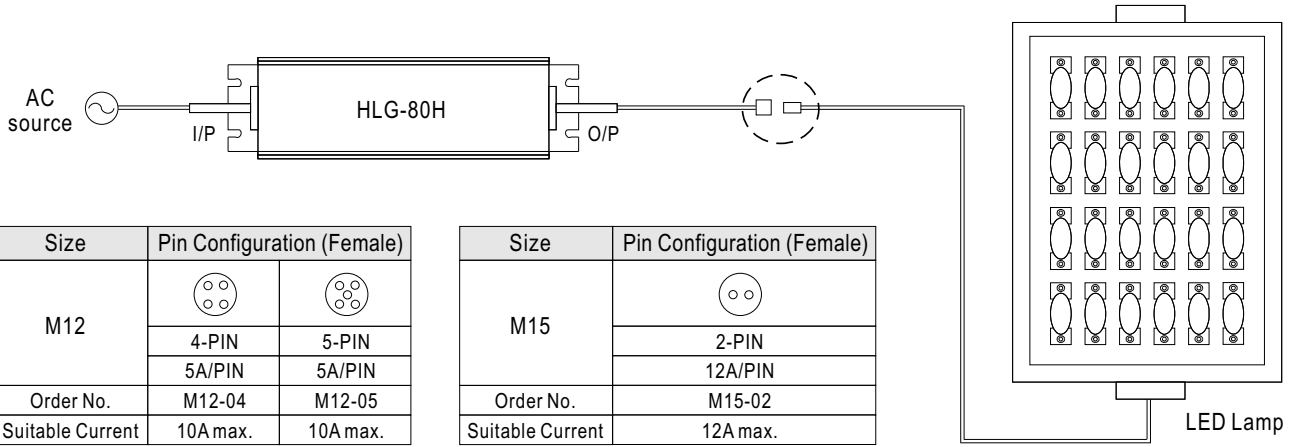


### Cable Joiner

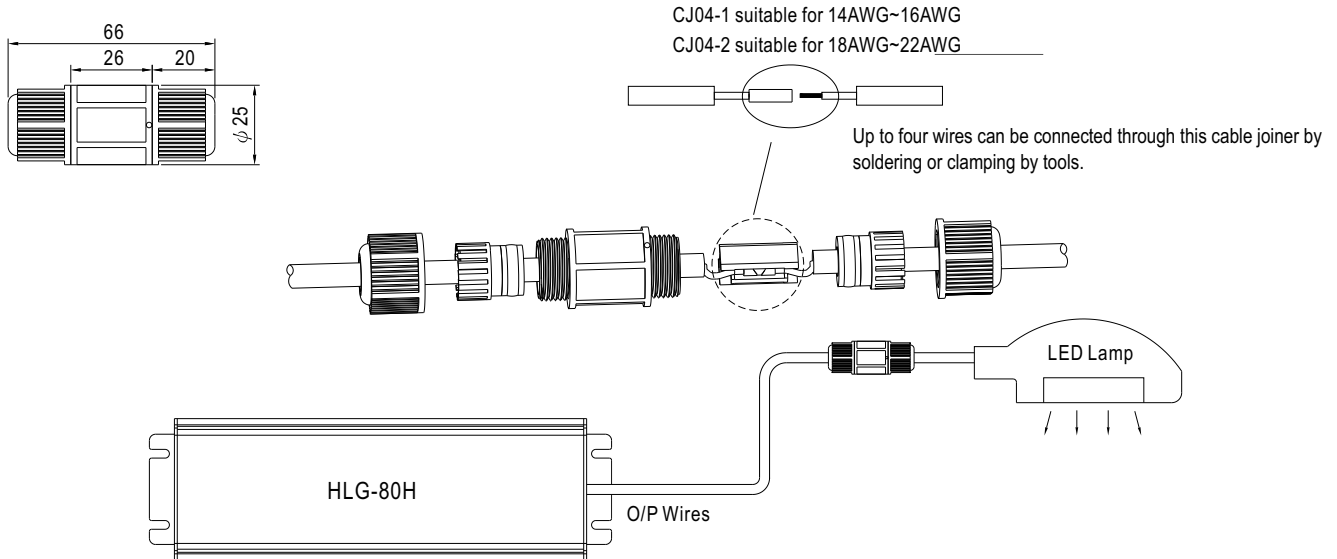

※CJ04 cable joiner can be purchased independently for user's own assembly.

MEAN WELL order No. : CJ04-1, CJ04-2.

### Junction Box(Optional)

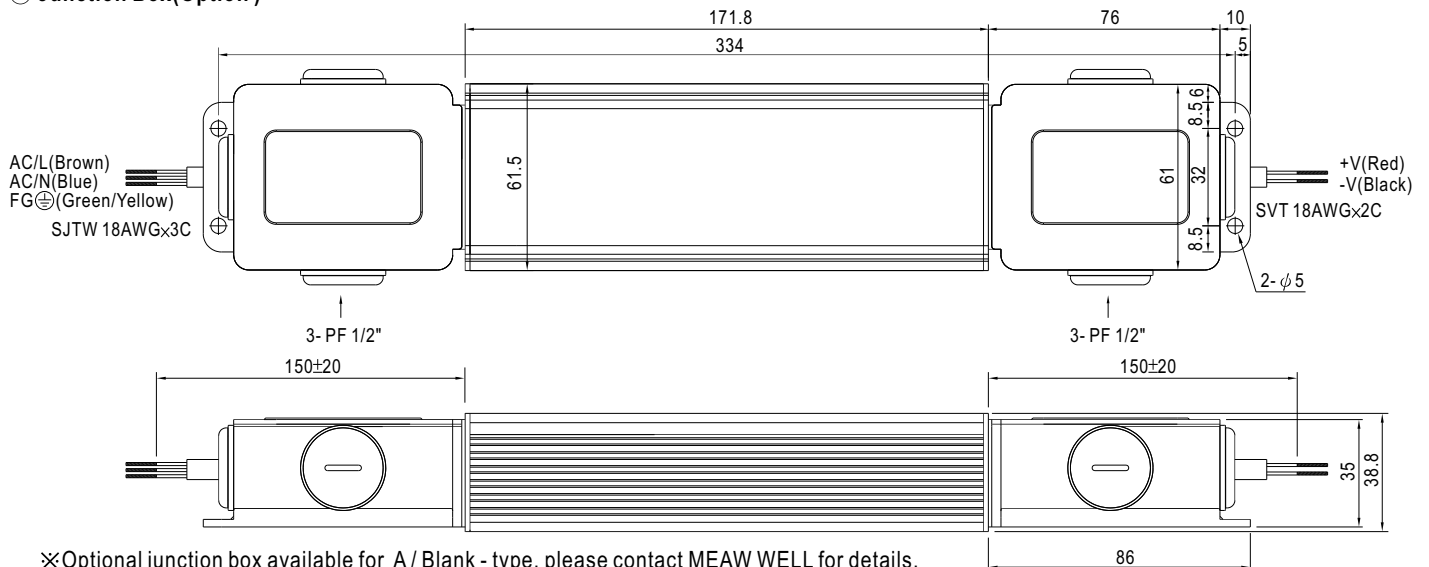

※Optional junction box available for A / Blank - type, please contact MEAN WELL for details.

※HLG-80H-□BL models with junction box at both input and output side are listed.